


W-BEAM RAIL

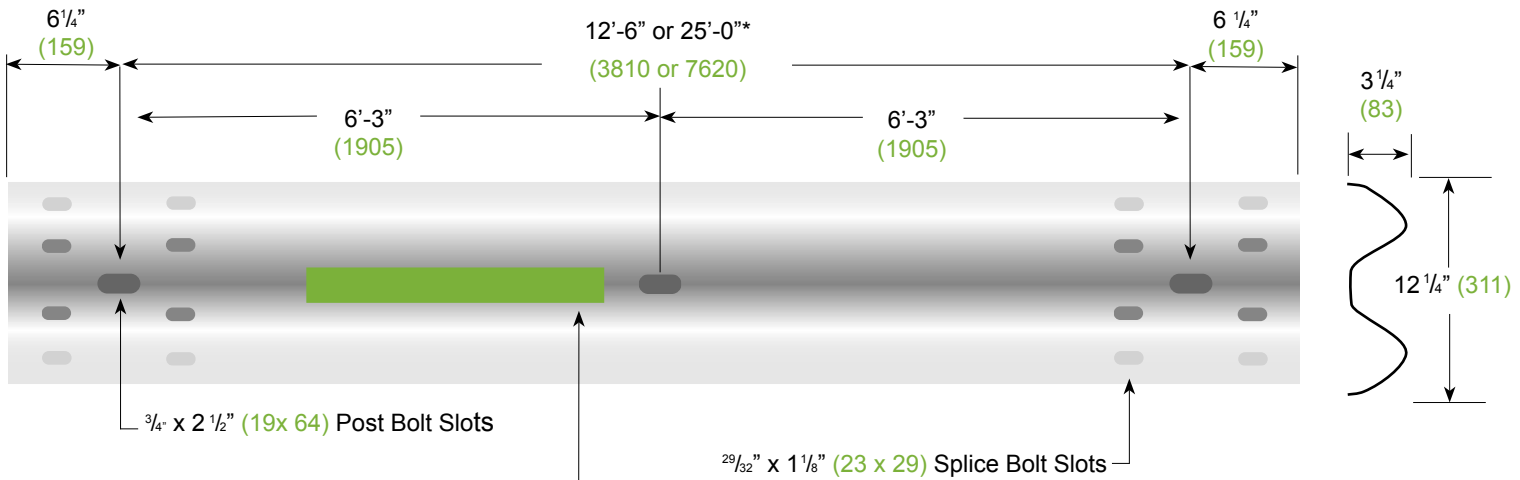

W-BEAM / THRIE BEAM CENTER PUNCHING

12'-6" (3810 mm)	SPACING	25'-0" (7620 mm)
8G / 208G	12'-6" (3810 mm)	O.C. 58G / 258G
9G / 209G	6'-3" (1905 mm)	O.C. 60G / 260G
11G / 211G	3'-1 1/2" (952 mm)	O.C. 61G / 261G

Part numbers shown for 12 gauge material; 10 gauge part numbers available upon request.

T M180 01234567 08 00 A 2

1 2 3 4 5 6

1. MANUFACTURER

T = Trinity Industries

2. AASHTO SPECIFICATIONS

3. MILL HEAT NUMBER

08 = Week (8th week)
00 = Year (2000)

5. CLASS

Class A = 12 gauge
Class B = 10 gauge

6. TYPE


Type 1 = Zinc Coated 1.8 oz/ft²
(550 g/m²) minimum
single spot

Type 2 = Zinc Coated 3.6 oz/ft²
(1100 g/m²) minimum
single spot

Type 3 = Uncoated steel

Type 4 = Weathering Steel

THRIE BEAM RAIL

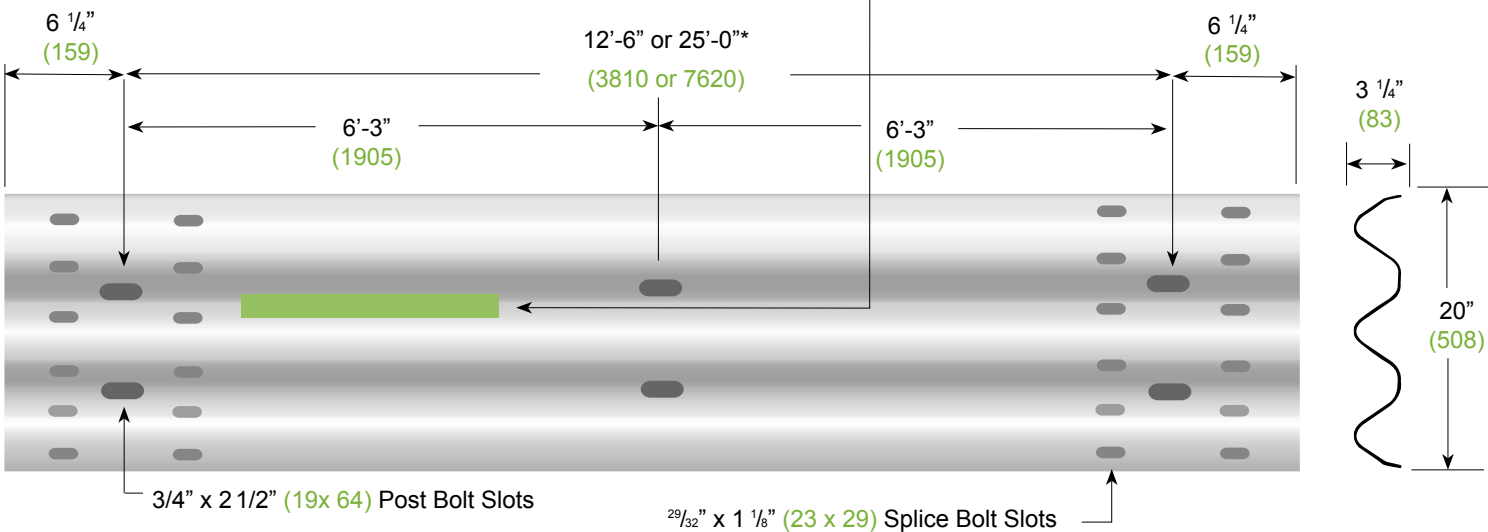

(Metric numbers in green)